


# TEMPERATURE (& HUMIDITY) CABINET

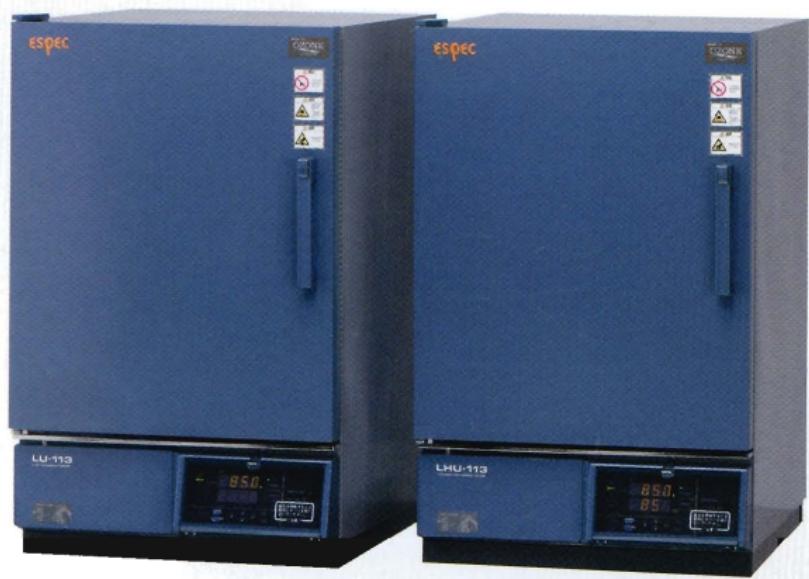

Photograph is LHU-113, LU-113

Compact desk-top models. The PID temperature indicator controller automatically and precisely controls operation upon setting the desired temp/humid value. (LH/ LHL/ LHU type)

An air-cooled HFC refrigerant refrigerator and insulation support a wide temperature range. Precise control is maintained by a BTC system. (LC type)

Model	Power supply	Temperature & humidity range	Inside dimensions W×H×D mm
LH-113	100V AC 1φ 50/60Hz	+10°C above room temp. to +85°C / 45 to 95%rh	
LHL-113	115V AC 1φ 60Hz	+5 to +85°C / 40 to 95%rh	500×600×390
LHU-113	220V AC 1φ 50/60Hz	-20 to +85°C / 40 to 95%rh	
LU-113	230V AC 1φ 50/60Hz	-20 to +85°C	